

9097250 TOSHIBA (DISCRETE/OPTO)

56C 7559 DT-33-09

2SC2562

SILICON NPN EPITAXIAL TYPE (PCT PROCESS)

HIGH CURRENT SWITCHING APPLICATIONS.

FEATURES:


- Low Collector Saturation Voltage :
 $V_{CE(sat)} = 0.4V$ (Max.) (at $I_C = 3A$)
- High Speed Switching Time : $t_{stg} = 1.0\mu s$ (Typ.)
- Complementary to 2SA1012.

MAXIMUM RATINGS ($T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	60	V
Collector-Emitter Voltage	V_{CEO}	50	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	5	A
Collector Power Dissipation ($T_c = 25^\circ C$)	P_C	25	W
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature Range	T_{stg}	-55~150	$^\circ C$

INDUSTRIAL APPLICATIONS

Unit in mm

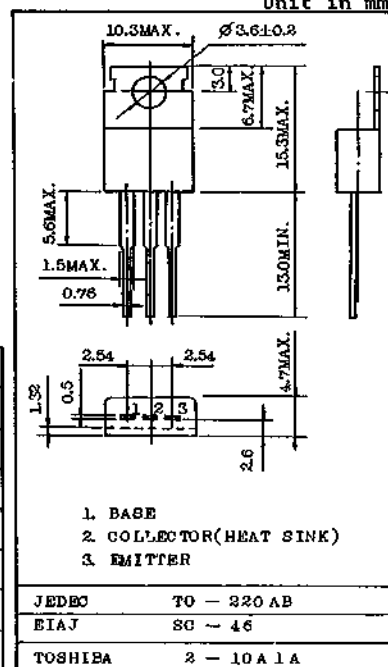ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)Mounting Kit No. AC75
Weight : 1.9g

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB} = 50V, I_E = 0$	-	-	1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = 5V, I_C = 0$	-	-	1	μA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 10mA, I_B = 0$	50	-	-	V
DC Current Gain	$h_{FE(1)}$ (Note)	$V_{CE} = 1V, I_C = 1A$	70	-	240	
	$h_{FE(2)}$	$V_{CE} = 1V, I_C = 3A$	30	-	-	
Saturation Voltage	Collector-Emitter	$I_C = 3A, I_B = 0.15A$	-	0.2	0.4	V
	Base-Emitter	$I_C = 3A, I_B = 0.15A$	-	0.9	1.2	
Transition Frequency	f_T	$V_{CE} = 4V, I_C = 1A$	-	120	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = 10V, I_E = 0, f = 1MHz$	-	80	-	pF
Switching Time	Turn-on Time	$I_{B1} = -I_{B2} = 0.15A$ DUTY CYCLE $\leq 1\%$ $V_{CC} = 30V$	-	0.1	-	μs
	Storage Time		-	1.0	-	
	Fall Time		-	0.1	-	

Note : $h_{FE(1)}$ Classification 0 : 70~140, Y : 120~240







TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07560 DT-33-09

2SC2562





STATIC CHARACTERISTICS

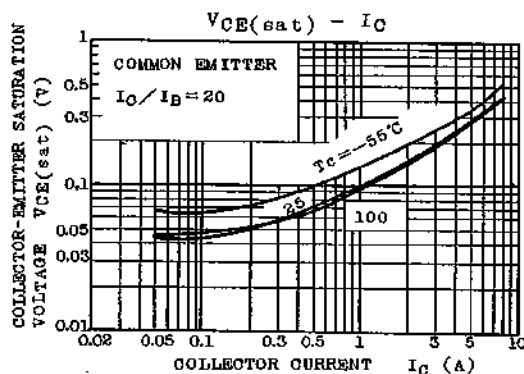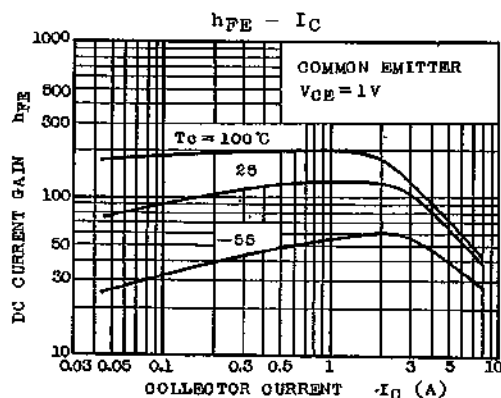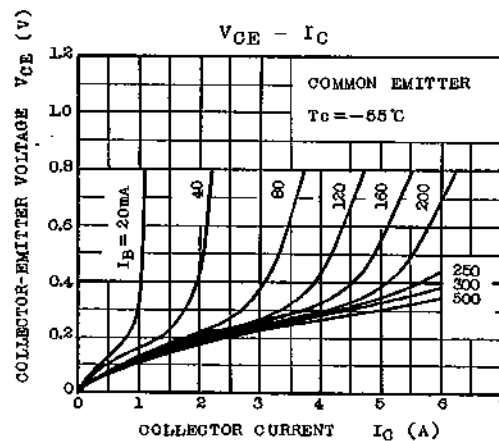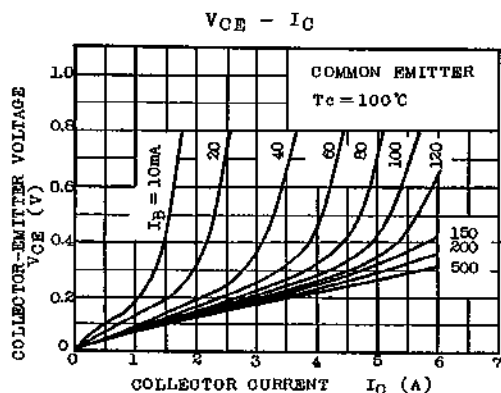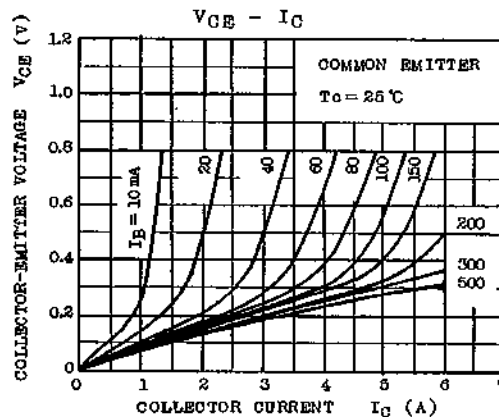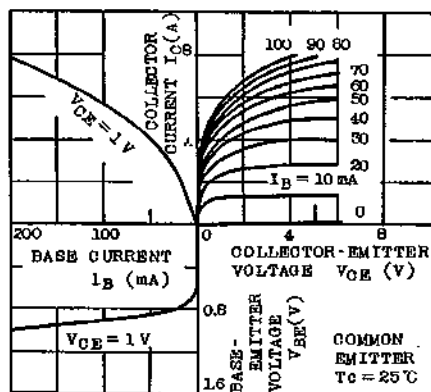

TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07561 07-33-09

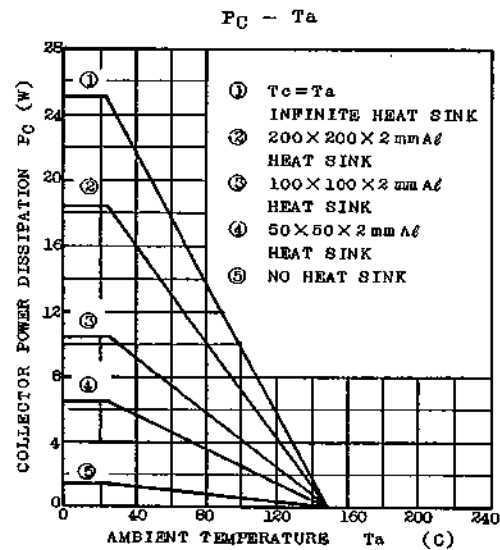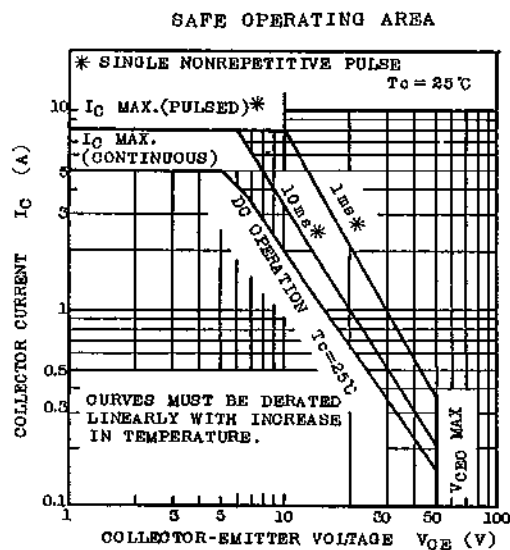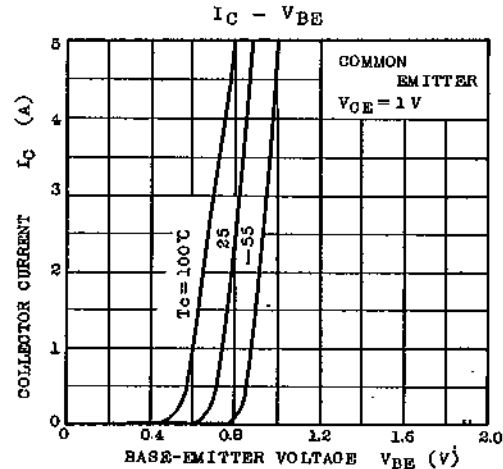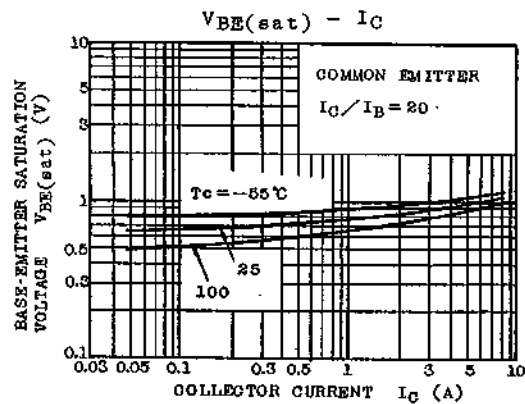2SC2562

TOSHIBA CORPORATION